



RUBBAIR DOOR

IMPACT TRAFFIC AND STRIP DOOR SOLUTIONS

Over 60 years - Serving Industry since 1952

NEW PRODUCT RANGE

With V-Cam Gravity Hinges

ultra-pro™

Features

Full thickness 48mm insulated construction

Custom made to exact opening size

Full height mount assembly

Rubber sub-frame and flexible foam.

Heavy-duty, gravity v-cam hinges (other options are available)

Sealed bearings

Factory aligned and pre-pinned hardware.

Durable, attractive ABS facings in a choice of colours

Meet U.S.D.A. guidelines

Semi-flexible Design Resists Impact Traffic Abuse in Retail, Commercial and Industrial Applications

The most versatile traffic door on the market today, the Ultra-Pro™ has been proven in a variety of applications. With its attractive appearance and range of colour options, the Ultra-Pro™ is well suited for most commercial applications. Fully insulated and gasketed, it is an excellent door for temperature control in restaurants, supermarkets, and food processing facilities. All materials meet U.S.D.A. guidelines, making the Ultra-Pro™ a good choice for meat packing plants as well. Durability features built into the Ultra-Pro™ door allow it to resist impact by carts, pallets, and hand traffic.

Engineered to be Durable, Shock Absorbing and Maintenance-Free. The Ultra-Pro's™ patented framework and flexible urethane foam insulation allow it to absorb impacts from commercial and light industrial traffic.




The V-cam is constructed of corrosion resistant high-strength mechanite and uses a scaled roller bearing that requires no lubrication.

The rugged ABS facing is available in a variety of colours and won't chip, dent, peel, pit or corrode. This proven construction withstands punishing abuse and provides years of dependable operation and attractive appearance with minimal maintenance.

Attractive appearance for retail design and rugged construction for industry.



Ultra-Pro™

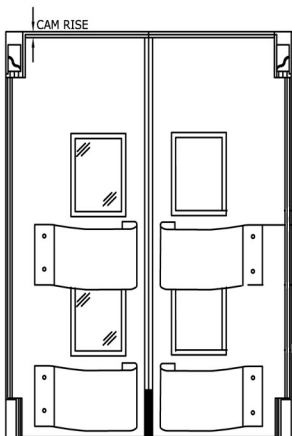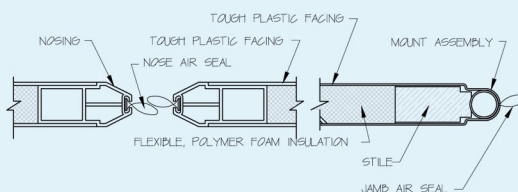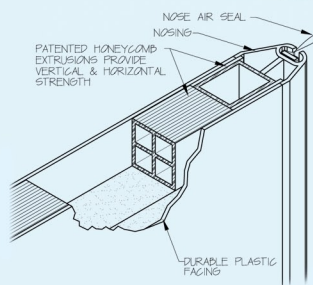

Custom Made For Every Application.

Ultra-Pro™ doors are custom-made to suit your application to within 3mm of opening size, up to 2438mm wide and 3048mm high. Transoms or dutch doors are suggested for opening higher than ten feet. Many impact protection options are available to provide years of smooth operation and trouble-free service.

Other Options:

Moulded spring bumpers from 305mm to 1219mm

Impact panels of ABS, vinyl or stainless steel

222mm jamb guard or combination bottom bearing and jamb guard.

Cam hardware with extended swing.


Multiple window sizes and configurations.

Mounting strip for narrow jambs.

Self-supporting steel frames.

Weld plates.

The Ultra-Pro™ door has options for nearly every application

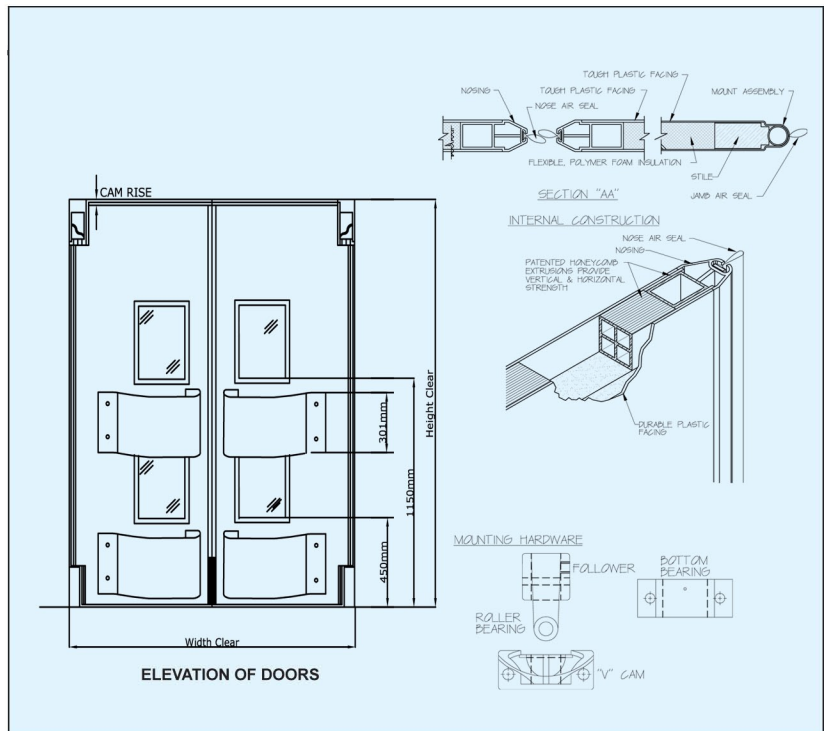

Easy to install. Easy to Use. Easy to Maintain.

Easy Installation

A mounting template is provided with the instructions to simplify installation. Once the hinges are fastened in place, the Ultra-Pro™ door will be operational in minutes. The cam follower is factory aligned and pre-pinned to the steel shaft for a fast, trouble free installation. To fine-tune the installation to off-square doorways, centring adjustments are provided.

V-Cam Hinges for All Applications

Ultra-Pro™ provides a choice of hinges featuring the V-cam hinge design. The toughest hardware on the market. 19mm rise V-cam gravity hinges are standard. For air pressure applications, the 38mm rise cam and the deep seat cam are available. Choose one of our extended swing hinges for tight turning traffic flow.

NOTE: Other hinges are available on request.

Low Maintenance

Occasional light-weight oiling of the shaft is all that is needed for smooth, quiet, trouble-free performance.

RUBBAIR DOOR

100 Groton-Shirley Rd.
Ayer, MA 01432 • USA

Toll Free: 800-966-7822

Tel: 978-772-0480

Fax: 978-772-7114

Email: sales@rubbair.com

www.rubbair.com

European Office

Eckel House, Half Moon Street
Bagshot, Surrey GU19 5AL • UK

Tel: +44 (0) 1276 479911

Fax: +44 (0) 1276 453333

Email: sales@rubbair.co.uk

www.rubbair.com